

PERFORMANCE ANALYSIS OF 4 STROKE HYBRID (PETROL+WATER) TEST RIG

Prof.B.D.Sarode
 Harshit Sadarang, Anup Dubey
 (Department of Mechanical Engineering)
 K D K College of Engineering Nagpur
 (sadarangharshit@gmail.com)
 (anupdubey17081995@gmail.com)

Abstract- In the present scenario the growing concern of the people living in every part of society is the ever increasing price of fuel and the harmful effects caused due to higher level of pollutants in the atmosphere. For that search, alternative fuels are encouraged. One of the closest solution to control the above two concern is the evolution of the hybrid vehicle. The water hybrid vehicle uses an HHO (Oxy Hydrogen) generator to supply hydrogen on demand by Electrolysis. This reduces the exhaust gas emitted during the working of engine, and the temperature of the engine is also reduced which is produced by the burning of ordinary fuels. The HHO gas is injected into the inlet manifold of the combustion chamber through the air filter of the engine. It minimizes the carbon deposition in the cylinder thereby increasing the changing period of engine oil, it also improves the efficiency of the engine and the life span.

Keywords: Hybrid Vehicle, HHO generator, Electrolysis

1. INTRODUCTION

Alternate fuel is important and it should be fossil one. Actually we spend 30% of our income for our vehicle fuelling and it produces harmful decomposed materials like CO, NO_x, HC, CO₂ etc. in the form of smoke. These materials affect the engine performance and pollutes the environment. Compare to other kinds of fuel around the world, water is one of the free recourses and by applying the technique, it can be converted into hydrogen with oxygen, its chemical term is HHO and in general "Free Energy". HHO is popular and common gas produced from electrolysis. HHO referred to as Hydrogen gas, water gas, and brown gas (in automotive applications) is a weekly bonded water molecule which exists in gaseous state. It is 2:1 molar mixtures of hydrogen and oxygen This mixed HHO ignites releasing the extra electrons into the igniting fuel and thus the added extra energy from the HHO leads cent percent of complete burning of the fuel. The only by-product resulting from the combustion of Hydrogen gas within the engine is water vapor. The outcome get by this project is that there is increasing in mileage of the vehicles up to certain percentage according to their specification & running condition of vehicle.

2. DETAIL DESCRIPTION

2.1 Working Principle

An HHO generator is a device which produces HHO gas. Basically, HHO generator involved in production of hydrogen and oxygen through the process of electrolysis. In this process a DC current passed through water, as a result of which water is divided into its primary constituent's viz. Hydrogen and oxygen. Then the produced HHO gas with the help of electrolysis is added in to the air intake manifold and injects in to the cylinder where HHO & fuel mixture ignites and results complete combustion of the hydrocarbons fuel, lowering emission and increasing fuel efficiency.

2.2 PROPERTIES OF HYDROGEN

- Wide Range of Flammability
- Low Ignition Energy
- Small Quenching Distance
- High Auto ignition Temperature
- High Flame Speed
- High Diffusivity
- Low Density

Table 1 : Properties of diesel ,petrol,CNG,H₂[3,4,5,6]

Sr. No	Properties	Diesel	Petrol	CNG	H ₂
1.	Auto Ignition Temperature(K)	530	533-733	723	858
2.	Minimum Ignition energy(mj)	--	0.24	0.28	0.02
3.	Flammability Limits (volume% in air)	0.7- 5	1.4 - 7.6	0.4- 1.6	4 – 75
4.	Stoichiometric air fuel ratio on mass basis	14.5	14.6	14.49	34.3
5.	Flame velocity(cm/sec)	30	37- 43	38	265-325

2.3 PRODUCTION OF HYDROGEN

We are using electrolysis method to producing the HHO. It is safe method as compare to the using the readymade HHO cylinder, because the readymade HHO is difficult to handle and store also it is more explosive. So, it requires more care and attention.

Electrolysis of Water

In this method, electrical energy is used to break water into H₂ and O₂. In principle, an electrolysis cell consists of two electrodes, commonly flat metal or carbon plates, immersed in an aqueous conducting solution called the electrolyte. A source of DC voltage connected to the electrodes so that electric current flows through the electrolyte from anode to cathode. By placing two pieces of metal in electrolyte and applying electricity, the water (H₂O) can instantly be separated into Hydrogen and Oxygen. The separated gas molecules surface and regroup to form HHO Gas, which is an unbounded mixture of Hydrogen and Oxygen. Since water itself is the poor conductor of electricity an electrolyte like KOH is used increase the electric conduction.

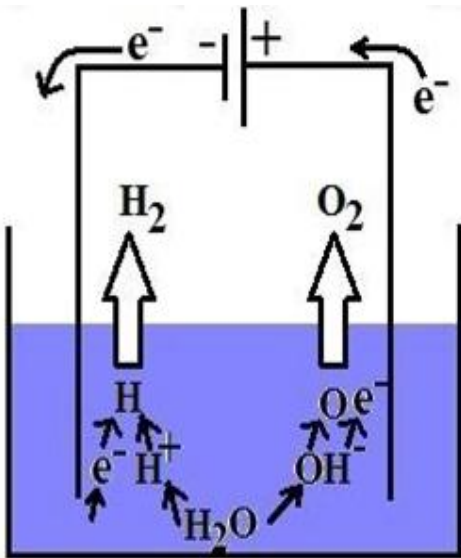


Fig 1 : electrolysis of water

2.4 EXPERIMENTAL SETUP

An experimental set-up line diagram is shown as below: A conventional S.I engine of Hero Honda Ambition bike of 100cc is used as an experiment. Hydrogen generation is carried out by the HHO generator which held the process of electrolysis of water. A 12V current which is required to carry out electrolysis process i.e. HHO generation process. Water needed for this process is high quality water like D.M water or Distilled water or R.O water. The water used for this purpose is changed after

1000kms. Or say after water color changes to maroon/red accent. Following is the HHO generator we have used for this experiment.

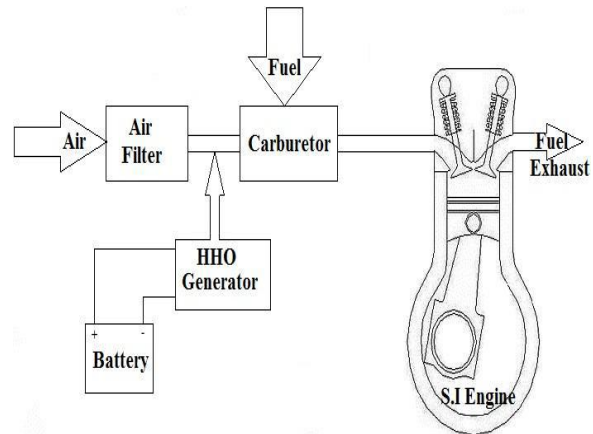


Fig 2 : Schematic illustration of HHO system

2.5 Engine Specification

Table 2: Engine Specification

Vehicle Name	Hero Honda Street
Type	Four stroke SI Engine
No. of cylinder	One
Maximum power	6.5 bhp/8000 rpm
Start	Kick
A/F ratio	14.7:1
Engine displacement	100 cc

3. WORKING & ANALYSIS OF MODEL

3.1 WORKING OF HHO GAS IN ENGINE

In the combustion chamber the Petrol which comes from the fuel tank gets mixed up with the mixture of air and hydrogen gas coming from the HHO generator. The hydrogen gas mixed with air enriches the fuel. As the hydrogen gas is highly flammable it helps in efficient burning of the fuel. Hydrogen has higher flame speed and H₂ addition results in lean combustion.



Without HHO



With HHO

We introduce it into the engine by use of the engines vacuum. The HHO combines with air and is burnt together in the combustion chamber. Once burnt, it converts back to H₂O. Water absorb the inner heat from the engine normal at 350 - 450°F and turn into super heated dry steam then it's pushed out during the exhaust

stroke and out the tail pipe. The most amazing part of the process is that the emissions are reduced to exceptionally clean low levels.

3.2 Effect on Fuel Consumption

Table 3. Engine Readings

Petrol only				Petrol & HHO gas		
Speed (rpm)	Load (lb)	mf2 (g)	mf1 (g)	Load (lb)	mf2 (g)	mf1 (g)
1350	30.5	150	66	32	180	101
1500	28	130	45	30	110	28
1750	25	170	85	27	180	99
2000	16	150	77	18	150	81
2250	7	100	22	9.5	160	86
2500	1.2	120	40	1.8	140	65

3.3 Sample of Calculations:

By taking the readings at speed 2000rpm

When using Petrol Only:

$$1. BP = (16 * 2000 / 4500) * 0.7457 = 5.634 \text{ kw}$$

$$2. B.s.f.c = m_f / BP$$

$$m_f = 150 - 7760 * 1000 = 1.22E-3 \text{ kg/s}$$

$$B.s.f.c = 1.0004 / 5.63 = 2.16E-04 \text{ kg/kw.s}$$

When using Petrol with HHO Gas:

$$1. BP = (18 * 2000 / 4500) * 0.7457 = 6.3 \text{ kw}$$

$$2. B.s.f.c = m_f / BP$$

$$m_f = 150 - 8160 * 1000 = 1.15E-3 \text{ kg/s}$$

$$B.s.f.c = 1.00015 / 6.3 = 1.83E-04 \text{ kg/kw.s}$$

4. Conclusion

Analysis have been carried out to investigate the effect of HHO gas on the emission and performance of a 4 stroke engine. A new design of HHO fuel cell has been performed to generate HHO gas required for engine operation. The generated gas is mixed with a fresh air in the intake manifold. The exhaust gas concentrations have been sampled and measured. The following conclusions can be drawn.

1. HHO cell can be integrated easily with existing engine systems
2. The engine thermal efficiency has been increased, when HHO gas has been introduced into the air/fuel mixture, consequently reducing fuel consumption.

3. The concentration of NO_x, CO and HC gases has been reduced, when HHO is introduced into the system.
4. The best available catalyst was found to be KOH, with concentration 6 g/L.
5. The proposed design for separation tank takes into consideration the safety precautions needed when dealing with hydrogen fuel.

It is recommended for the future work to study the effect of both compression ratio and ignition advance on the engine performance and emissions with introducing HHO gas into the gasoline engine.

5. REFERENCES

1. Dhananjay Babariya¹, Jay Oza², Bhavin Hirani³, Gaurang Akbari “AN EXPERIMENTAL ANALYSIS OF S.I ENGINE PERFORMANCE WITH HHO AS A FUEL IJRET, Volume:04
2. Hameed Ullah Mughal, Naseem Abbas*, Nasir Hayat, Syed Fiaz Hussain Shah and Muhammad Sajid Kamran EXHAUST GAS ANALYSIS OF 70-CC ENGINE RUNNING ON MIXTURE OF HHO PETROL Sci.Int.(Lahore),27(5),
3. AADITYA¹ ABHISHEK² AJAY³ VIPIN⁴ DEEPAK HYDROGEN POWERED PETROL ENGINE (HHO ENGINE) International Journal of Scientific & Engineering Research, Volume 6, Issue 5
4. A.Vamshi Krishna Reddy, T.Sharath Kumar, D.K. Tharun Kumar, B. Dinesh, Y.V.S. Saisantosh
5. “Improving The Efficiency Of I.C. Engine Using Secondary Fuel”, IJTEE VOL 2, ISSUE 6
6. Mohamed M. EL-Kassaby, Yehia A. Eldrainy *, Mohamed E. Khidr, Kareem I. Khidr “Effect of hydroxy (HHO) gas addition on gasoline engine performance and emissions” Alexandria Engineering Journal (2016)